

微電腦型雙顯示幕控制電錶

(MICROPROCESS DUAL DISPLAY PANEL CONTROLLER METER)

MODEL
MM2D



■特點(FEATURES)

- .精確度0.1%滿刻度 ± 1 位數(Accuracy 0.1% F.S. ± 1 digit)
- .可同時量測與顯示交直流電壓/交直流電流(Dual input measuring and display DCA/DCV/ACA/ACV)
- .顯示範圍0- ± 19999 可任意規劃(Programmable rate 0 to ± 19999 digit)
- .類比輸出運算功能(Analog output math-function(IN1,IN2,IN1+IN2,IN1-IN2,IN1xIN2,IN1/IN2))
- .2組獨立警報功能(Two alarm function)(optional)
- .15 BIT 類比輸出功能(15 bit DAC analog output function)(optional)
- .數位RS-485界面(Digit RS-485 interface function)(optional)

1.MODEL:MM2D-

(選購型號)

NO	Input Type	NO	Input1 Range	NO	Input2 Range	NO	Input1 Alarm	NO	Input2 Alarm	NO	Analog output	NO	RS-485	NO	Aux. Power
A	DC	1	0-50mV	1	0-50mV	0	None	0	None	0	None	N	None	A	AC/DC18-60V
B	AC	2	0-20V	2	0-200mA	1	One	1	One	1	DC4-20mA	Y	RS-485	B	AC/DC90-260V
		3	0-150V	3	0-2A	2	Two	2	Two	2	DC0-10V				
		4	0-300V	4	0-5A					3	DC4-20mA		Modbus mode .256 nodes on bus		. Less 4VA for AC/DC input
		9	SPECIFIED	9	SPECIFIED					9	SPECIFIED				




.Relay contact (AC250V-5A,DC30V-7A)

.Two-wire transmitter (Exciting voltage DC10-36V)

2.SPECIFICATION (主要規格)

- . Measuring accuracy : 0.1% F.S. ± 1 digit
(精確度) (23 ± 5) : 0.2% F.S. ± 1 digit(AC)
- . Readout range : 0- ± 19999 digit adjustable
(顯示值範圍)
- . Alarm delay time : 0- 99.9 second adjustable
(繼電器延遲動作時間)
- . Alarm action : HI or Lo adjustable
(繼電器動作方向)
- . Relay contact output : AC 250V-5A, DC 30V-7A
(繼電器容量)
- . Analog output resolution : 15 bit DAC
(類比輸出解析度)
- . Response time : < 250ms(0-90%)
(輸出反應速度)
- . Output drive capability : < 10mA for voltage mode
(輸出負載能力) < 10V for current mode
<[(V+)-7.5V]/20mA for two-wire mode
- . Output ripple (p-p) : < 0.1% F.S.
(輸出之漣波)
- . RS-485 address : "01"- "FF"
(通訊位址)
- . RS-485 baud rate : 19200/9600/4800/2400 selective
(傳輸速度)
- . RS-485 protocol : Modbus RTU mode
(通信協議)
- . Temp. coefficient : 100ppm/ (0-50)
(溫度係數)
- . Display : Red high efficiency LEDs high 10.18 mm(.4")
(顯示幕)
- . Parameter setting : Touch switches
(參數設定方式)
- . Memory mode : Non-volatile E² PROM memory
(記憶型式)
- . Dielectric strength : 2KVac/1 min. (input/output/power)
(絕緣耐壓能力) 1600 Vdc (input/output)
- . Operating condition : 0-50 (20 to 90% RH non-condensed)
(使用環境條件)
- . Storage condition : 0-70 (20 to 90% RH non-condensed)
(存放環境條件)
- . CE EMC Certification : EN 55022:1998/A1:2000 Class A
(CE認證) EN 61000-3-2:2000
EN 61000-3-3:1995/A1:2001
EN 55024:1998/A1:2001

3.OUTSIDE DIMENSION AND CONNECTION DIAGRAM (外型尺寸與開孔尺寸與配線圖)

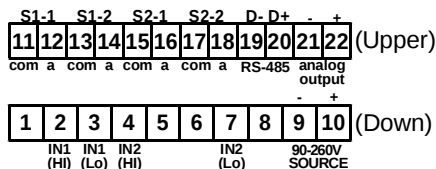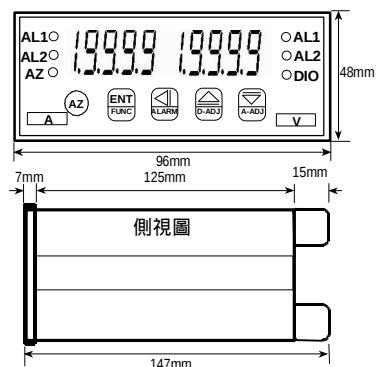

<http://www.gotojs.com>

0512-67574144