


RD6 TYPE

微型十字滑块型

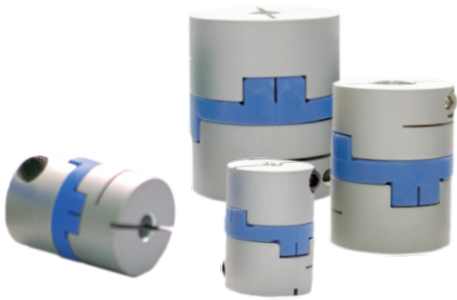


规格

型号	额定 扭矩 [N·m]	最大 扭矩 [N·m]	最高 转速 [rpm]	惯性 力矩 [kg·m ²]	静态扭 转刚性 [N·m/rad]	径向 偏差 [mm]	角向 偏差 [°]	质量 [g]
RD6-16S	0.7	1.4	9500	3.2×10 ⁻⁷	31	1.0	3	7
RD6-20S	1.2	2.4	7600	1.0×10 ⁻⁶	60	1.5	3	14
RD6-25S	2	4	6100	3.0×10 ⁻⁶	140	2.0	3	27
RD6-32S	4.5	9	4800	9.5×10 ⁻⁶	280	2.5	3	50
RD6-40S	9	18	3800	2.3×10 ⁻⁵	540	3.0	3	80
RD6-50S	18	36	3100	6.7×10 ⁻⁵	820	3.5	3	150
RD6-16C	0.7	1.4	9500	5.8×10 ⁻⁷	31	1.0	3	12
RD6-20C	1.2	2.4	7600	1.5×10 ⁻⁶	60	1.5	3	19
RD6-25C	2	4	6100	4.4×10 ⁻⁶	140	2.0	3	36
RD6-32C	4.5	9	4800	1.4×10 ⁻⁵	280	2.5	3	69
RD6-40C	9	18	3800	4.1×10 ⁻⁵	540	3.0	3	130
RD6-50C	18	36	3100	1.2×10 ⁻⁴	820	3.5	3	230

* 工作温度为-20℃~80℃。在环境温度较高时，额定扭矩和最大扭矩承载量降低。
* 惯性力矩和重量按最大孔径计算。

尺寸

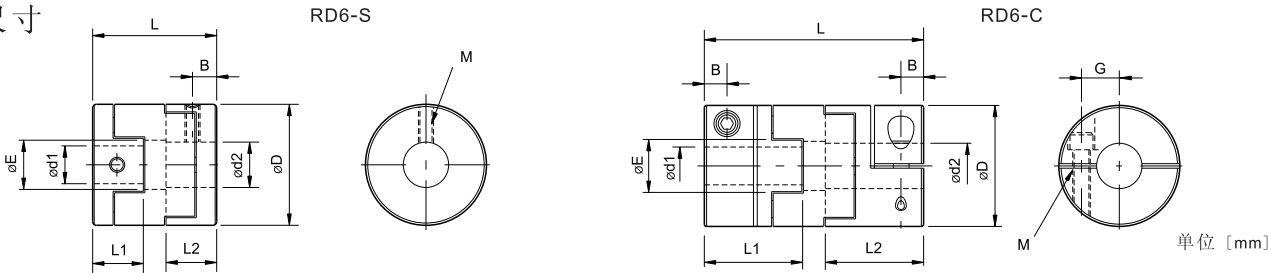

型号	d1·d2		D	L1·L2	L	E	B	G	M	拧紧 力矩 [N·m]
	最小	最大								
RD6-16S	3	6.35	16	7	18	7	3.5	—	M3	0.7
RD6-20S	4	8	20	9	23	9	4.5	—	M4	1.7
RD6-25S	5	10	25	11	28	11	5.5	—	M5	4
RD6-32S	8	14	32	13	33	14.5	6.5	—	M6	7
RD6-40S	10	16	40	14	32	17	7	—	M6	7
RD6-50S	14	20	50	17	38	23	8.5	—	M8	15
RD6-16C	4.5	6	16	13	29	7	3	5	M2.5	1
RD6-20C	6	8	20	14	33	9	3	6.5	M2.5	1
RD6-25C	6.35	10	25	17	39	11	3.8	9	M3	1.5
RD6-32C	8	14	32	19	45	14.5	4.5	11	M4	2.5
RD6-40C	12	16	40	23	50	17	7	13	M5	4
RD6-50C	16	20	50	27	58	23	8	16	M6	8

标准孔径

型号	标准孔径 d1 • d2 [mm]																	
	3	4	4.5	5	6	6.35	7	8	9.525	10	11	12	14	15	16	18	20	25
RD6-16S	●	●	●	●	●	●												
RD6-20S		●	●	●	●	●	●	●										
RD6-25S				●	●	●	●	●	●	●								
RD6-32S								●	●	●	●	●	●					
RD6-40S										●	●	●	●	●	●			
RD6-50S													●	●	●	●	●	
RD6-16C			●	●	●													
RD6-20C					●	●	●	●										
RD6-25C						●	●	●	●	●								
RD6-32C								●	●	●	●	●	●					
RD6-40C												●	●	●	●			
RD6-50C															●	●	●	

* 所有产品皆配有紧固螺栓和沉头螺栓。
* 紧固螺栓型孔径公差H8
* 轴心公差建议为h6或h7。
* 可根据要求提供紧固螺栓型、夹持型和其他复合型联轴器。
* 带有●号的数值栏内的孔径为标准孔径。特殊孔径和键槽可按需求加工。敬请咨询。

订购时

RD6 - 20□ - 6 - 8
外径尺寸
S: 紧固螺栓型
C: 夹持型
孔径: d1-d2