


10:1

PIN	定义
1	SDA
2	CLK
3	RSTB
4	AO
5	CS1B
6	VSS
7	VDD
8	V0

3.3V
1uF

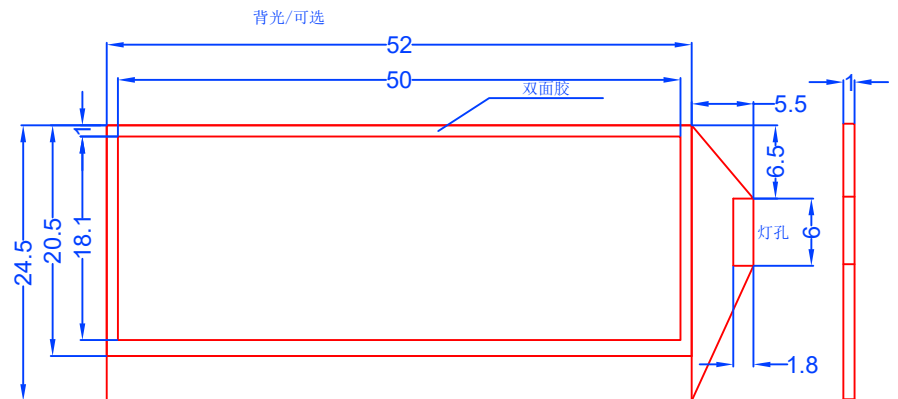

NOTE:

- | | | |
|---|--------------------|---------------------|
| 1 | DISPLAY TYPE | : STN /POSITIVE |
| 2 | VIEWING DIRECTION | : 6 O'CLOCK |
| 3 | POLARIZER MODE | : TRANSMISSION |
| 4 | DRIVE METHOD | : 1/65DUTY 1/9 BIAS |
| 5 | OPERATIVE VOLTAGE | : 9V |
| 6 | OPERATING TEMP | : -20°C---+70°C |
| 7 | STORAGE TEMP | : -30°C---+80°C |
| 8 | CONNECTOR | : COG/IST3932 |
| 9 | UNSIGNED TOLERANCE | : ±0.20 |

NO.	REVISION RECORD	NAME	DATE					
1								
2				UNIT	mm	TITLE	OUTLINE DIMENSIONS	
3				SCALE	N:1	MODEL	MSB999DMWGW	
4				REV	A	DESIGNED	CHECKED	APPROVED
5				PAGE	1/2			